

CVM-B100

CVM-B150

Power analyzers for panel

Description

The **CVM-B100** and **CVM-B150** units are panel mounted three-phase power analyzers (dimensions: 96x96 and 144x144 mm, respectively). Both offer 4-quadrant measurement (consumption and generation). Suitable for Medium or Low voltage installations, in both 3 or 4-wire three-phase circuits, two-phase circuits with or without neutral, single-phase circuits or ARON connections.

The **CVM-B100** and **CVM-B150** high-performance units feature a measurement engine that allows the user to analyse many different electrical parameters, in addition to offering a large variety of optional expansion modules for the same unit.


Features:

- Format: 96x96 (**CVM B100**) and 144x144 (**CVM B150**)
- High-resolution VGA colour screen
- IP 65* front panel protection
- 5 voltage inputs (3 phases + neutral + earth) 1000 V_{f-f}
- 4 Current inputs, ITF
- Class 0.2 voltage and current accuracy
- Class 0.5S energy accuracy
- Expandable unit, up to 4 modules, combining digital and analogue outputs, Modbus/TCP, MBus, LonWorks, Profibus, XML/Web
- Modular (optional addition of expansion modules)
- Touch-sensitive movement buttons
- Universal power supply source
- RS485 communications port (Modbus/RTU and BACnet protocols)
- Customisation of parameters to be displayed

Other features:

- Innovative SCV interface (Slide, Choose & View) for versatile data display, enabling the customisation of the parameters displayed on the screen
- Electrical parameters: instantaneous, maximum, minimum (with date and time) and demand
- Incremental electrical parameters (energy), times, costs, emissions
- 3 Tariffs (can be selected via the digital input or RS485 communications)
- Capable of showing costs and kgCO₂ emission sources on the screen, depending on the energy consumed or generated
- 2 Relay outputs for alarms with delay, times, ON and OFF, etc.
- 2 transistor outputs for alarms or impulse generation, with all the possible configuration parameters
- 2 digital inputs, with control over the selection of the unit's tariffs or configurable for monitoring purposes, with RS-485 Modbus communications, monitoring of logical states of other electromechanical units. (RCCBs, thermal-magnetic circuit breakers, etc.)

* with sealing joint.

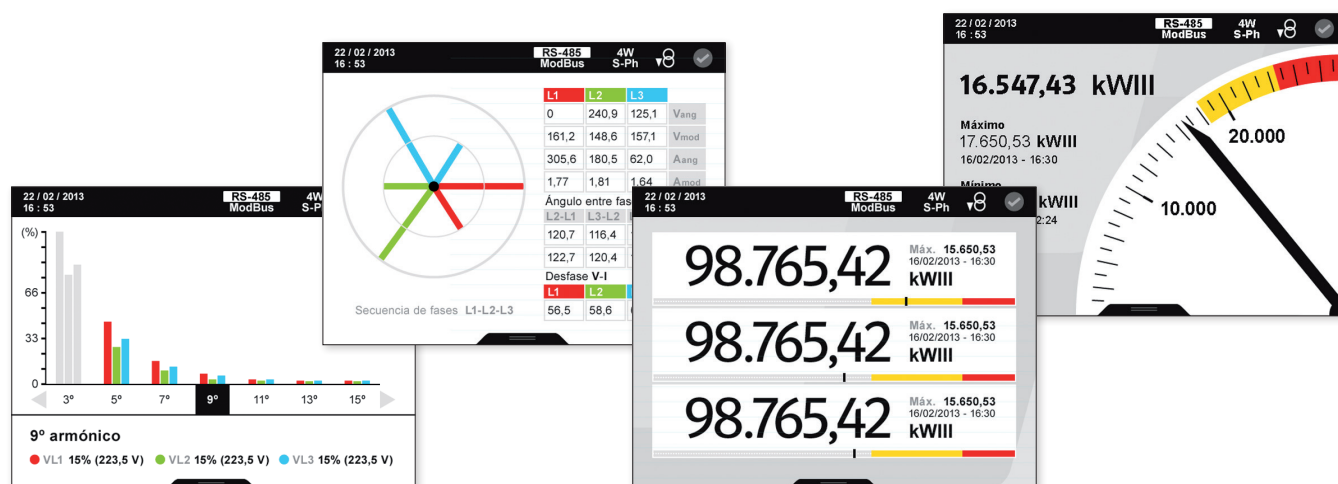

CVM-B100

CVM-B150

Power analyzers for panel

Applications

- Control and monitoring of all electrical parameters measured in any electric distribution panel and low and high-voltage connection points.
- 4 alarms (2 per transistor and 2 per relay), fully and independently programmable: low or high value, hysteresis, connection/disconnection delays, normally open or closed standby status and interlocking.
- Generation of impulses with transistor outputs, fully and independently configurable over any incremental parameter (energy, costs, kgCO₂, total meter or tariff hours)
- Transducer that converts analogue signals to any instantaneous parameter that the unit can measure or calculate, with built-in expansion modules with analogue outputs.
- Display of process signals, with a built-in expansion module with analogue inputs; optional reporting of these signals to SCADA systems through communication systems
- Control of electrical load or alarm signal operations by programming the transistor or relay outputs that are built-in or added through expansion modules.
- Autonomous datalogger with web server, connected to a **M-CVM-AB-Datalogger** module. Enables direct monitoring of the historical data stored in the unit via a conventional web browser.

Technical features

Power circuit	Power supply voltage	100...240 Va.c. ±10% / 120...300 Vd.c.*
	AC Frequency	45...65 Hz
	AC Consumption	CVM-B100 - 6...8 VA (max. 24 VA) CVM-B150 - 7...12 VA (max. 28 VA)
	DC consumption	CVM-B100 - 3...4 W (max. 22 W) CVM-B150 - 4...7 W (max. 26 W)
Voltage measurement circuit	Voltage range	600 V _{p-n} - 1000 V _{p-p}
	Frequency	40...70 Hz
	Measurement margin	25 %...200% of the U _n for U _n =300 Vac (p-n)
	Admissible overvoltage	750 Vac
	Maximum consumption (limited current)	< 0.1 VA
Current measurement circuit	Current measurement	4 (3 phases + 1 neutral)
	Input current	.../5 A or .../1 A or .../250 mA
	Minimum current for class	250 mA
	Start-up current	10 mA (0.4 mA with MC transformers)
	Measurement margin	0.010 .. 10 A
	Admissible overload	10 A permanent, 100 A t < 1 s
	Consumption	< 0.15 VA
Maximum transformation ratios	Primary V : 6,000,000 (phase-neutral)	
	Primary A : 10,000	
	Product of Primary V x Primary A <60,000,000,000	
Maximum meter value (total)	Yes (Primary A / Secondary A) < 1,000 (2 GW)	
	Yes (Primary A / Secondary A) ≥ 1,000 (2 TW)	
Accuracy class	Voltage	0.2%
	Current	0.2%
	Neutral current	0.5%
	Power	0.5% ± 1 digit
	Active energy	Class 0.5 S
	Reactive energy	Class 2
Display of harmonics	Voltage/Current	up to 50

* 20...120 Vd.c. optional

CVM-B100

CVM-B150

Power analyzers for panel

Technical features

Connections		
Digital inputs	Selection of tariffs, states or external alarms	
	Type	Optoisolated potential-free contact
	Quantity	2
	Activation current	4 mA (12 V maximum voltage of open contact)
	Insulation	4 kW
Digital outputs	Generation of impulses or alarms	
	Type	NPN transistor
	Quantity	2
	Maximum operating voltage	+/- 48 Vdc
	Maximum operation current	+/- 130 mA
	Maximum frequency	1000 impulses / second
	Pulse duration (T on / T off)	0.3 / 0.7 ms (1 ms of a complete impulse)
	Alarms	
	Type	Relay
	Quantity	2
	Maximum operating power	1500 VA / 180 W
	Maximum operating voltage	400 Vac
	Maximum switching current	6 A
	Electrical working life (400 V / 6 A)	3 x 10 ⁴ cycles
	Mechanical working life	1 x 10 ⁷ cycles
Built-in communications	Protocols	
	Modbus RTU / BACnet	
	Speed	
	9600...115200	
	bits, parity, stop	
	8, n, 1 (configurable)	
Environmental conditions	Operating temperature	
	-10...+50°C	
	Relative humidity	
	5...95%	
	Altitude	
	2000 m	
Build features	Format	
	Assembly on 3.7" x 3.7" or 5.6" x 5.6" panel	
	Depth	
	110 mm w/o expansion modules (both models)	
	Front panel IP Protection	
	IP 65*	
	Rear panel IP protection	
	IP 30	
Safety	Designed for CAT III 300/520 Vac installations, in accordance with EN 61010 Double-insulated electric shock protection, class II	
Standards	IEC 62053-22, ANSI (class 0.5S), IEC 62053-23 ANSI C12.1 (class 2), IEC 61010, IEC 61000, UNE-EN 55022. Measurement in accordance with MID, design in accordance with UL IEC 61000-4-2, IEC 61000-4-3, IEC 61000-4-11, IEC 61000-4-4, IEC 61000-4-5	

* with sealing joint.

References

96x96

Current measuring secondaries	Type
.../5 or .../1 A or ...250 mA	CVM-B100-ITF-RS485-ICT2

144x144

Current measuring secondaries	Type
.../5 or .../1 A or ...250 mA	CVM-B150-ITF-RS485-ICT2

CVM-B100

CVM-B150


Power analyzers for panel

Expansion modules for CVM B150 and CVM B100

Outputs	Digital Inp.	Analogue Inp.	Protocol	Communications	Type
8 Trans.(*)	8	-	-	-	M-CVM-AB-8I-8OTR
8 relay	8	-	-	-	M-CVM-AB-8I-8OR
8 (0/4...20mA) -	-	4 (0/4...20mA)	-	-	M-CVM-AB-4AI-8AO
-	-	-	Ethernet (Bridge RS-485)	Modbus/TCP	M-CVM-AB-Modbus-TCP
-	-	-	Ethernet	Web/XML/PowerStudio	M-CVM-AB-Datalogger
-	-	-	MBus	MBus	M-CVM-AB-MBUS
MSSE07 -	-	-	LonWorks	LonTalk ISO/IEC 14908 ANSI/EIA 7091	M-CVM-AB-LonWorks
-	-	-	-	Profibus/DP	M-CVM-AB-Profibus


Dimensions

CVM-B100

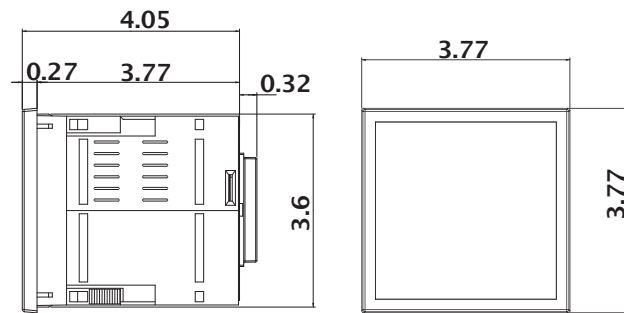


Window level: 3.6" x 3.6"

CVM-B150

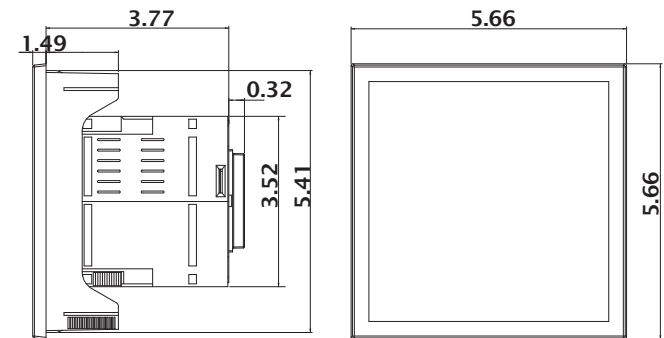

Window level: 5.4" x 5.4"

CVM-B Module

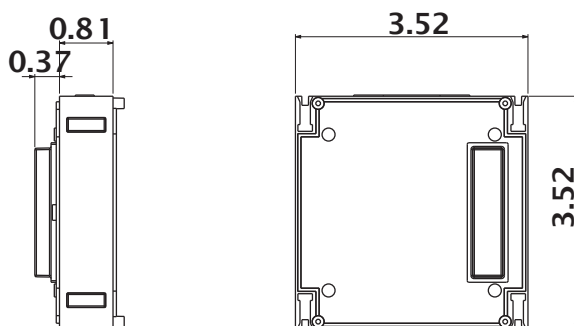

Note: Refer to the product manual for other options


CVM-B100

CVM-B150


Power analyzers for panel

Connections


Three-phase measurement, with or without voltage transformer and current transformers

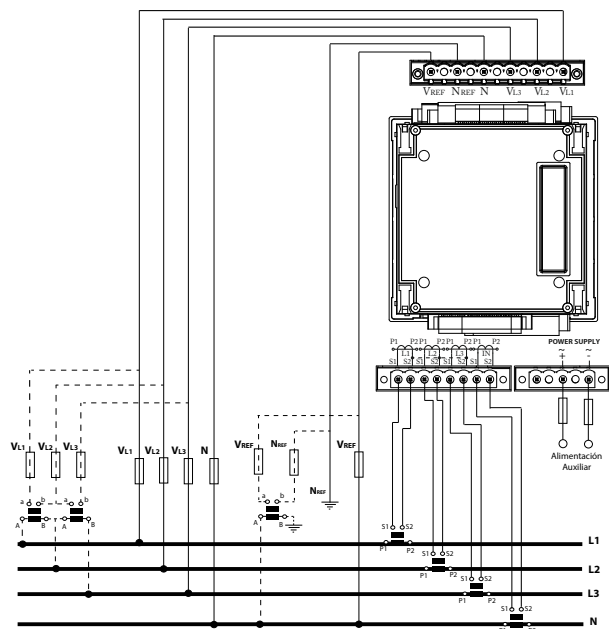


Three-phase measurement, with or without voltage transformer and MC3 type transformers (1250 mA) + MC1 for neutral current

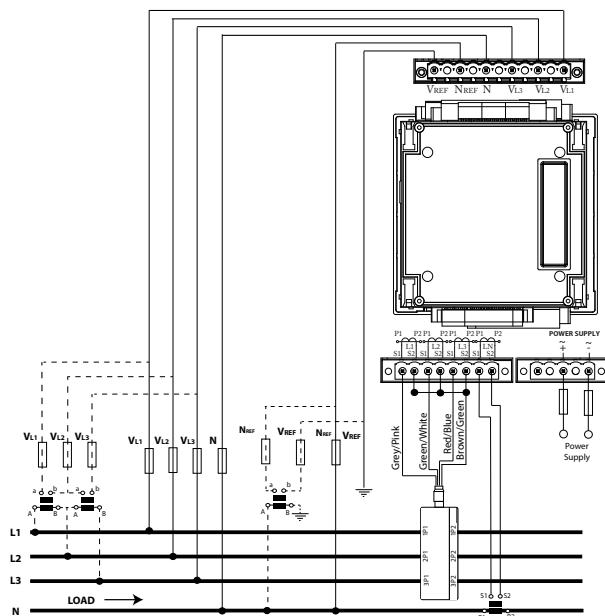

Direct phase-phase measurement with current transformers

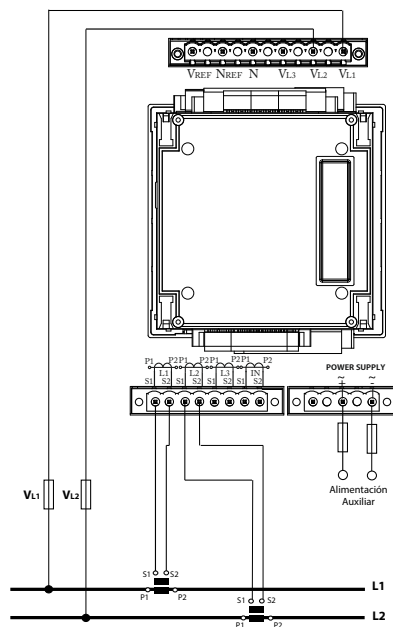

Measurement in single-phase system with or without voltage transformer

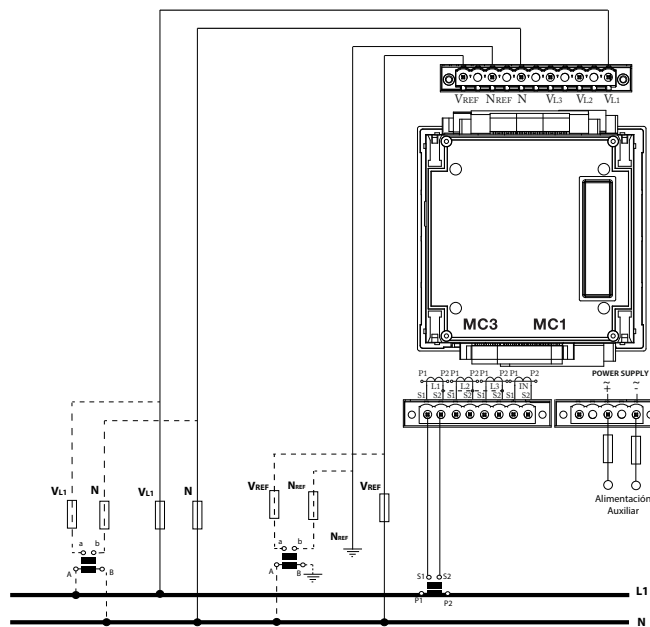

Note: Refer to the product manual for other options